



# Mini Hooter HPOL / HPOLB

**HPOL without horn with warning light**  
**HPOLB without horn with flash light**

- ▶ Impact-resistant housing of ABS
- ▶ Volume approx. 92 dB(A)
- ▶ Protection degree IP 43
- ▶ Separate control of hooter and light / flash light



## Application

In many fields of application it is necessary to give both optical and acoustic alarms. The mini hooter with warning light was designed for just such cases. Many applications also require two alarm stages, e.g. 1. alarm – optical signal, 2. alarm – optical and acoustic warning. Since it is possible to control the hooter system and light separately of each other, such alarms can be realized with the HPOL / HPOLB.

## Design


The HPOL / HPOLB mini hooter consists of an impact-resistant housing of ABS. The cap is made of polycarbonate. For optical signalling the HPOL is equipped with a 7 Watt/Ba 15 d bulb and the HPOLB with a xenon tube. The hooter system and light can be controlled separately of each other. The mini hooter is connected at screw terminals with a wire cross-section of up to 1.5 mm<sup>2</sup>.

## Alarm in a museum

The hooter system and bulb / flash light can be controlled separately of each other.



Housing	Thermoplastic (ABS), impact-resistant
Colour	grey
Cap	Polycarbonate
Cap colour	red or amber
Protection degree	IP 43 (IEC 529)
Operating position	Horn downwards
Operating mode	Continuous
Volume	Approx. 92 dB(A), 1 m (Regarding volume specifications, please see the chapter "Technical Informations".)
Light source	
HPOL	Bulb 7 W, Ba 15 d
HPOLB	Xenon tube 1 Joule
Temperature range	-20°C to +50°C
Weight	Approx. 0.185 kg

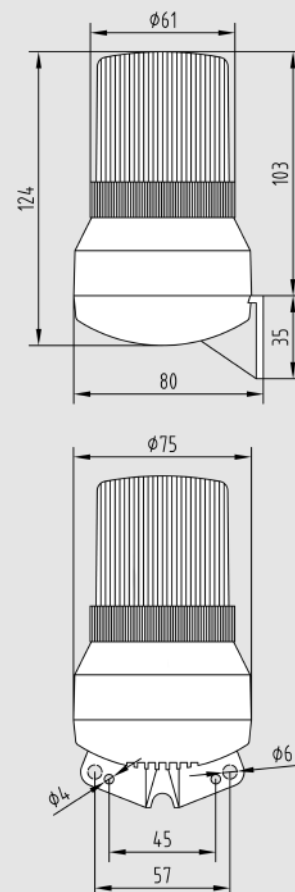

## Order information

Type	Name	Rated voltage in V	Rated current in A	Article no.
HPOL	Mini Hooter with Warning Light, with red cap	230 VAC 50 Hz	0.04	212 215 07
HPOL	Mini Hooter with Warning Light, with red cap	12 VDC	0.7	212 215 12
HPOL	Mini Hooter with Warning Light, with red cap	24 VDC	0.35	212 215 13
HPOL	Mini Hooter with Warning Light, with amber cap	230 VAC 50 Hz	0.04	212 216 07
HPOL	Mini Hooter with Warning Light, with amber cap	12 VDC	0.7	212 216 12
HPOL	Mini Hooter with Warning Light, with amber cap	24 VDC	0.35	212 216 13
HPOLB	Mini Hooter with Flash Light, with red cap	230 VAC 50 Hz	0.025	212 217 07
HPOLB	Mini Hooter with Flash Light, with red cap	12 VDC	0.30	212 217 12
HPOLB	Mini Hooter with Flash Light, with red cap	24 VDC	0.17	212 217 13

Other cap colours and voltage ratings on request

Subject to change without notice · Printout 03/12