

PROEx line

Z2 line



## ExII-Signalling Hooter mHP 12

High volume sound device  
for use in zone 1 and 2

- ▶ Protection degree IP54
- ▶ Volume approx 108 dB(A)
- ▶ Protection class II
- ▶ Explosion protection:  
II 2 G Ex e mb II T4
- ▶ Cable gland M20 x 1.5



### Application

The signalling hooter mHP 12 was developed for warning, calling and indicating purposes in zone 1 and 2 environment. The hooter produces a sound volume of approx. 108 dB(A) at 1 m distance. It can be delivered in most common voltages.

### Design

The driver system consists of a strong, non-pda rised electromagnet, whose striker hits the diaphragm between 100 and 120 times a second. All DC versions are equipped with an electronic contact breaker.

### Acoustic Signalling Device for zone 1 and 2

The signalling hooter mHP 12 was developed for warning purposes in zone 1 and 2 environment.






## Technical specifications

Housing Material	PC, black
Cable gland	M20 x 1.5
Cable cross section	up to 2.5 mm <sup>2</sup>
Type of protection	II 2 G Ex emb II T4 -20°C ≤ Ta ≤ +70°C

### Temperature range

AC / DC version	-20°C up to +70°C
Storage temperature	-60°C up to +80°C
Operating utilization	Sound outlet position downwards
Operating mode	Duty cycle ED 75%
Protection degree	IP54
Protection class	II
Volume	approx. 108 dB(A), 1m

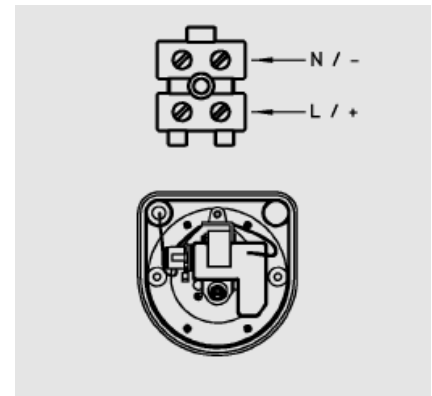

## Order information

Type	Name	Rated voltage U <sub>e</sub>	Current consumption	Article no.
<b>Version temperature range T4</b>				
mHP 12	Signalling hooter without con. cable T4	24 VDC	0.3 A	401030111210
mHP 12	Signalling hooter without con. cable T4	230 VAC	0.07 A	401030111207

Subject to change without notice · Printout 01/13